




## Quick installation Manual

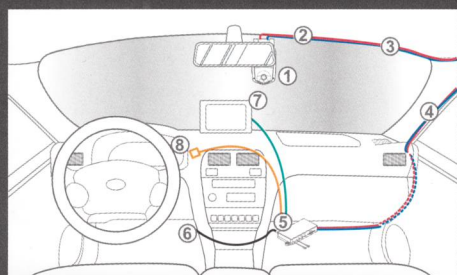


Interior view of installation (Front)

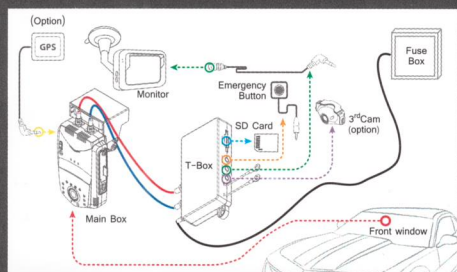


Product configuration



1 Place the device on the windshield as seen in the diagram and then clean the installation area. Remove the cover off the adhesive mount on the bracket and mount the product (with the bracket) to the windshield.




3 For a clean installation, conceal the cables by tucking them into the gap between the windshield and headliner as seen in the diagram.




5 Place the T-Box in the desired location and mount using adhesive or screws.

**Tip**


Recommended Placement :  
Underneath the seat or dashboard




7 To activate Video-Out, connect the T-Box and the monitor with the RCA cable as seen in the diagram. Use the included remote control to activate Video-Out features.



2 Connect the two cables from the T-Box and the main body.




4 Dismantle the A-pillar, as seen in the diagram, and put the cables into the rubber molding.



6 When connecting the wire to the fuse, connect the "ground wire" first.

- Red - B+ (e.g. internal light, emergency light, or other always-on power supply)
- Yellow - ACC (e.g. cigarette lighter power or ignition switch)
- Black - GND (e.g. car frame)



8 Mount the Emergency Button in a convenient place and plug it into the T-Box.

**Caution**

- Please read the manual carefully before installing the product.
- For parking surveillance, please ask the mechanic or technician for assistance.
- The fuse box may vary. Please check the vehicle manual before the installation.
- The cabling can be done by the user's convenience.